


This document captures ideas, experiences, and informal recommendations from the Yaskawa Partner Support team. It is meant to augment – not supersede manuals or documentation from motoman.com. Please contact the Partner Support team at partnersupport@motoman.com for updates or clarification.

How to display the Spot Gun Harness in MotoSim

Introduction

When creating a new controller that uses a Spot Gun Robot (SP80) by default the Spot Harness is not shown. Below are instructions to change that.

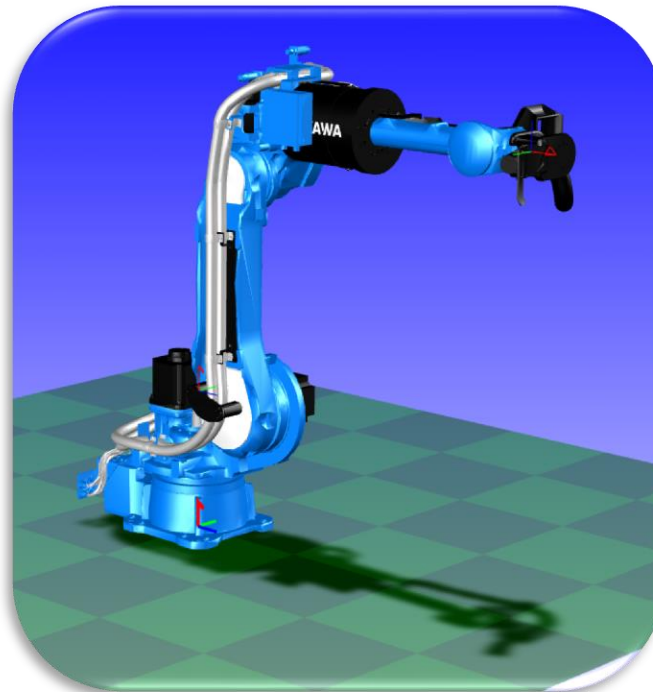


This document captures ideas, experiences, and informal recommendations from the Yaskawa Partner Support team. It is meant to augment – not supersede manuals or documentation from motoman.com. Please contact the Partner Support team at partnersupport@motoman.com for updates or clarification.


How to Display the Spot Harness

To display the Spot harness, during controller initialization, select the path button on the Model Confirmation window and follow the images below.


Model Confirmation Window

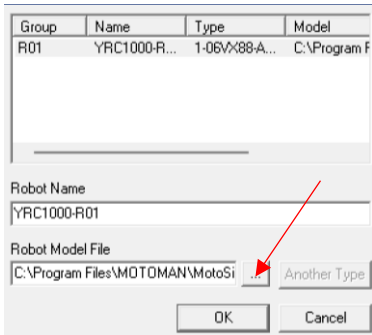


Select the External Equipment Folder

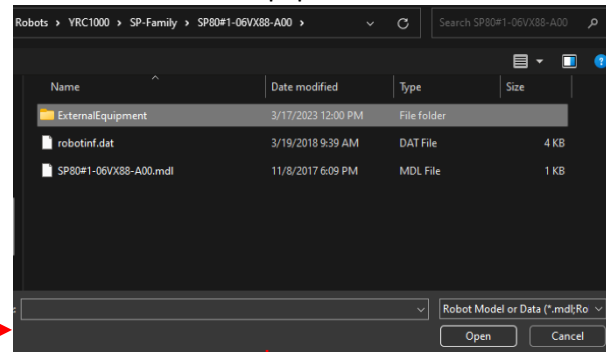

NOTE: If the controller has already been initialized, then go to the CONTROLLER tab and select MODEL SETTING



Select the .mdl file

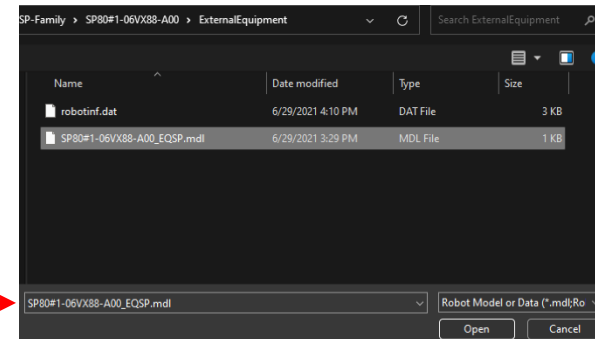

Confirm the Change

